


MODEL "C"

with Exterior Operated Damper

CAST ALUMINUM BRICK VENTS

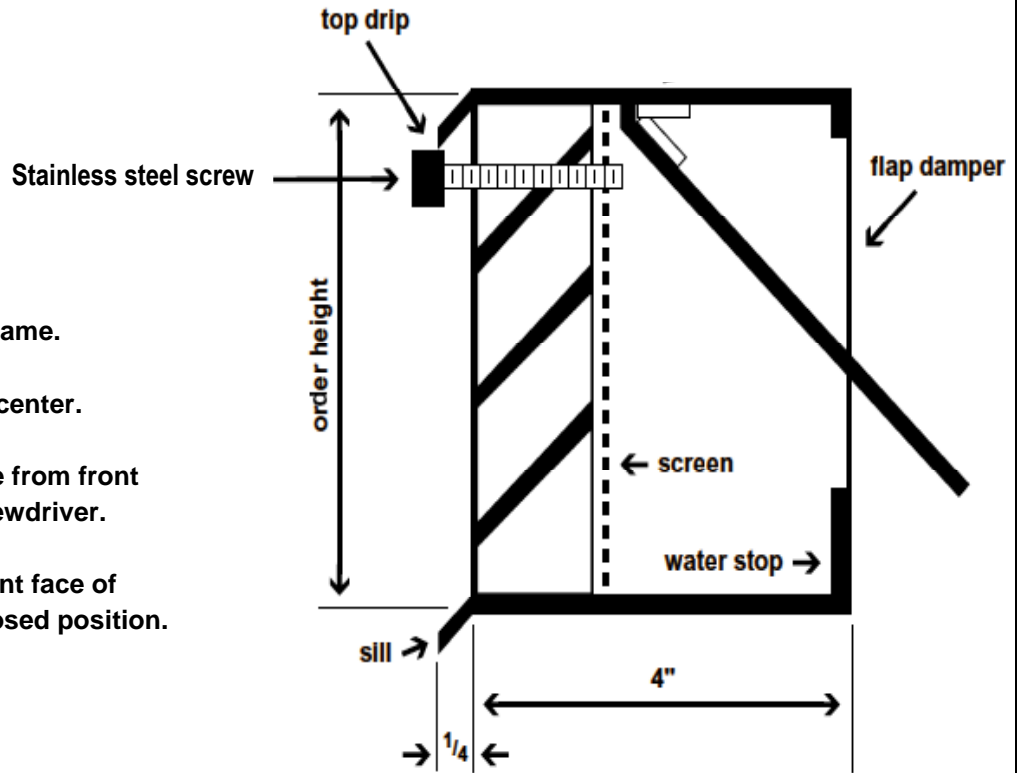

- 319 Alloy; 4" deep channel frame.
- 1" deep blades, one inch on center.
- Damper is manually operable from front face with a Phillips head screwdriver.
- Operator is flush with the front face of vent in both the open and closed position.

QTY.	MODEL #	ORDER SIZE	MINIMUM OPENING REQUIRED
	C847	8-1/4"W x 4-15/16"H	8-1/2"W x 5-1/8"H
	C808	8"W x 7-7/8"H	8-1/4"W x 8"H
	C125	12"W x 5"H	12-1/4"W x 5-1/4"H
	C128	12"W x 7-3/4"H	12-1/4"W x 8"H
	C164	16"W x 4-15/16"H	16-1/4"W x 5-1/4"H
	C166	16"W x 6"H	16-1/4"W x 6-1/4"H
	C168	16"W x 7-3/4"H	16-1/4"W x 8"H

FINISH:

SCREENS: #8 mesh - aluminum

<p>SUNVENT INDUSTRIES By SYLRO SALES CORP. 1 Industrial Drive, #26 Pelham NH, 03076 Toll Free: 1-800-325-4115 In NH: 603-595-4556 Fax: 603-595-4778 www.sunventindustries.com info@sunventindustries.com</p>	PROJECT:	
	LOCATION:	
	ARCHITECT:	
	CONTRACTOR:	JOB NO:
	AGENT:	ORDER NO:
	DATE:	REVISIONS:
	DWG NO: C w/EKD	