


MODEL "EX"

with Exterior Operated Damper

EXTRUDED ALUMINUM BRICK VENTS

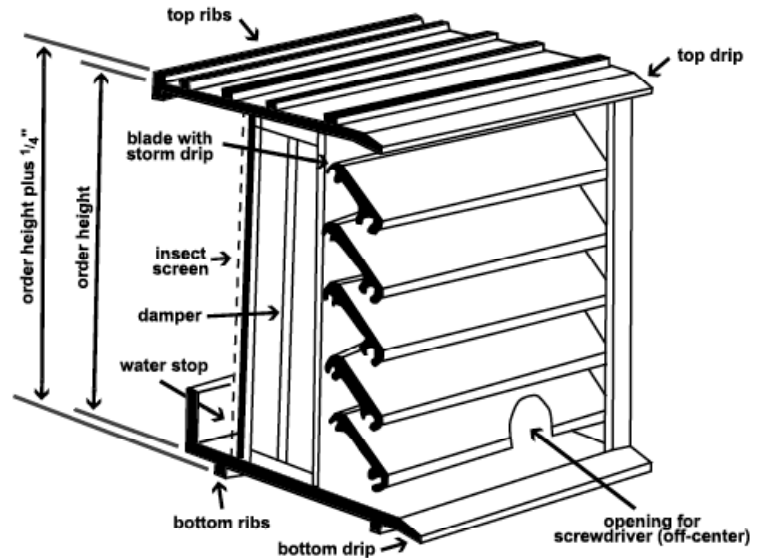

QTY	MODEL #	ORDER SIZE	FINISHED DIMENSIONS (includes +1/4" for top and bottom ribs)	MINIMUM OPENING REQUIRED

- Extruded aluminum to be 6063 - T5 Alloy. Minimum .125" thick.
- Blades are 1" deep, set at 45° angles, 1" on center.
- For any unit over 30" wide - do not mortar jamb sections.
- Damper: manually operable from the front face with a Phillips head screwdriver; one operator every 20" wide.

FINISH:

SCREENS: 18 X 14 aluminum mesh

SUNVENT INDUSTRIES By SYLRO SALES CORP. 1 Industrial Drive, #26 Pelham NH, 03076 Toll Free: 1-800-325-4115 In NH: 603-595-4556 Fax: 603-595-4778 www.sunventindustries.com info@sunventindustries.com	PROJECT:	
	LOCATION:	
	ARCHITECT:	
	CONTRACTOR:	JOB NO:
	AGENT:	ORDER NO:
	DATE:	REVISIONS:
		DWG NO: EX w/OBD