


MODEL "FL"

with Opposed Blade Damper and Sleeve

EXTRUDED ALUMINUM BRICK VENTS

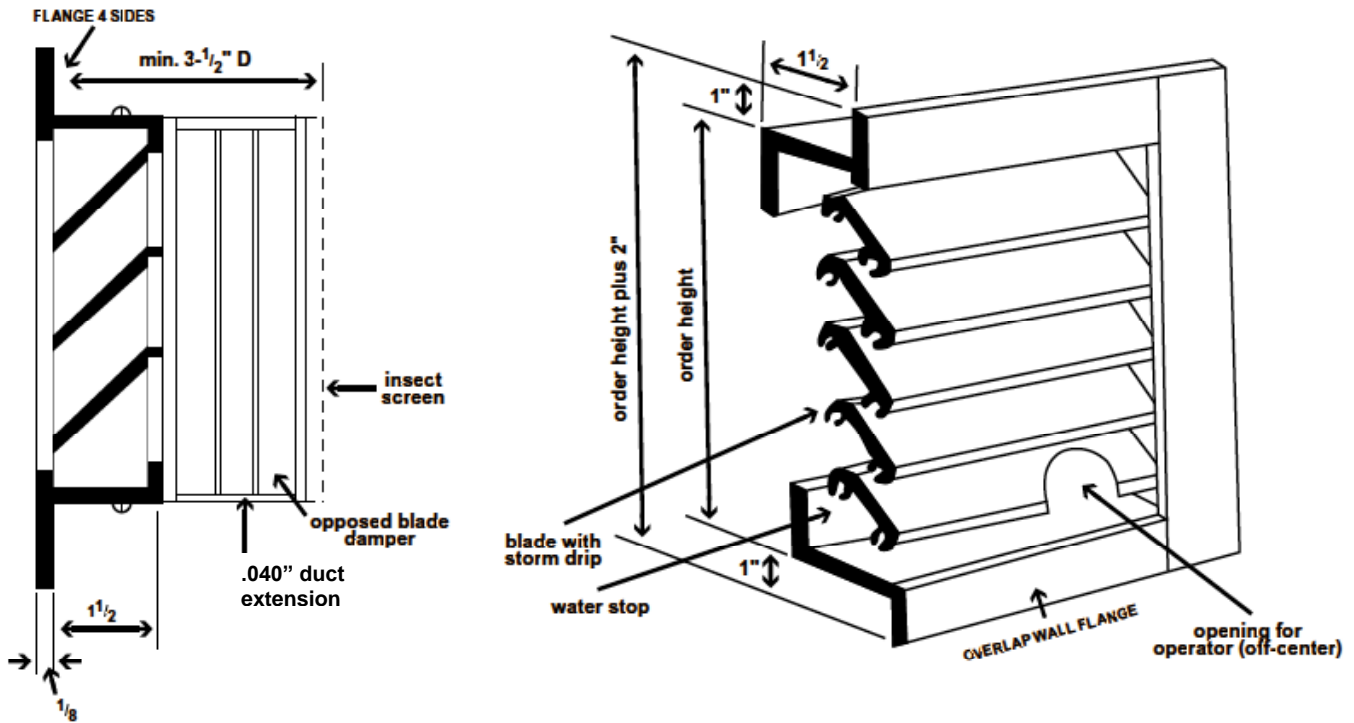

QTY	MODEL #	ORDER SIZE	FINISHED DIMENSIONS (+1/4" to order size width for mechanical fasteners)	MINIMUM OPENING REQUIRED

- Extruded aluminum, 6063 - T5 Alloy. Minimum .125" thick.
- Blades are 1" deep, set at 45° angles, 1" on center.
- For any unit over 30" wide - do not mortar jamb sections.
- Damper: Manually operable from the front face with a Phillips head screwdriver; one operator every 20" wide.
- Sleeve: .040" aluminum; 3-1/2" overall depth to accommodate damper.

FINISH:

SCREENS: 18 X 14 aluminum mesh

SUNVENT INDUSTRIES
 By SYLRO SALES CORP.
 1 Industrial Drive, #26
 Pelham NH, 03076
 Toll Free: 1-800-325-4115
 In NH: 603-595-4556
 Fax: 603-595-4778
www.sunventindustries.com
info@sunventindustries.com

PROJECT:

LOCATION:

ARCHITECT:

CONTRACTOR:

AGENT:

DATE:

JOB NO:

ORDER NO:

REVISIONS:

DWG NO: FL-OBD